Garlock

Tamping Tools

To suit Slurry Pumps

Superior Installation Tools:

Compression packing used in heavy duty slurry pump applications must be correctly installed to achieve a desired outcome. Each packing ring needs to be installed and seated with recommended level of compression for the material being used. This is achieved with the use of a Tamping Tool that transfers the load from the gland follower to each ring of packing during Installation.



Figure 1: Single Split Ring with Magnets

What is a Tamping Tool?

A series of split rings able to fit in the stuffing box to consolidate packing rings.

Various styles and materials can be used, however the Garlock Split Ring Magnetic removal device is the most simplistic on the market.

Value & Benefits

Tamping Tools provide an improved method to consolidate packing rings which increases Packing Performance and reduces Maintenance Costs by:

- Providing a simple way to compress each ring of packing.
- Better startup outcomes.
- Improved performance of packing set, and longer life.
- Having a suitable tamping set for each pump size available.
- Speed up the installation process with repeatable outcomes.
- Ensure rings are properly seated for best Safe Operation.



Figure 2: Split 3 Ring Set

Garlock Provide Sets Specific to your Pump Dimensions

Helping industry become;

More Safe More Productive More Sustainable

GARLOCK PTY LTD an Enpro

Company AUSTRALIA Head Office: 2/198 Walters Rd, Arndell Park, NSW 2148, Australia

PH: 1800 4275625


Email: austsales@garlock.com






Variety of Tamping Tool Configurations are Possible with one set:

The following depicts the procedure for tamping the various rings in a Type 1 or 2 arrangement

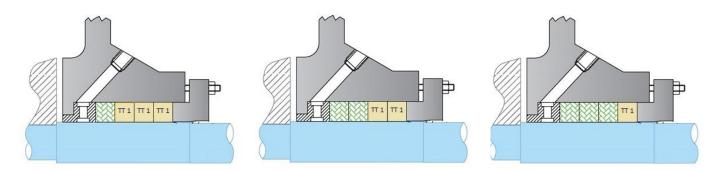

The following depicts the procedure for tamping the various rings in a Type 3 arrangement

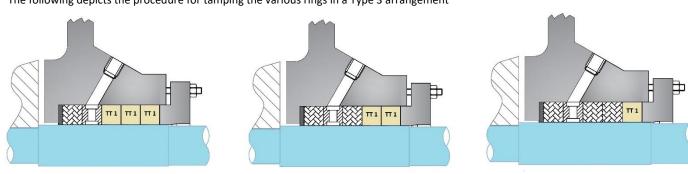

Tamping Tools can be supplied as simple split rings with extraction holes, allowing the use of a packing extractor for removal, or the better alternative is to use the Garlock Magnetic Design, that allows for automatic removal of the tamping rings when the gland follower is pulled back.

The following chart refers to part numbers for the 3 ring Magnetic Tamping Tool Set

Warman Frame Size	Part No	TT 1 Width
B Frame	Coming soon	10mm
C Frame	Coming soon	10mm
D Frame	TTHDMDX-08251081	12mm
E Frame	TTHDMEX-10131333	15mm
F Frame	TTHDMFX-13021694	20mm
G Frame	TTHDMGX-17782287	25mm

Tamping Recommendations for common Compression Packing

Lantern Restrictor Style 1					
Compression Packing	1 st ring	2 nd ring	3 rd ring	4 th ring	
Style 1965	Tamp 20%	Tamp 20%	Consolidate	Consolidate	
Style PM6	Consolidate	Consolidate	Consolidate	Consolidate	
Style 1965K	Tamp 20%	Tamp 20%	Consolidate	Consolidate	
Lantern Restrictor Style 2					
Style 1965	Tamp 20%	Tamp 20%	Consolidate	Consolidate	
Style PM6	Consolidate	Consolidate	Consolidate	Consolidate	
Style 1965K	Tamp 20%	Tamp 20%	Consolidate	Consolidate	
Neck Ring Style 3					
Style 1965	Tamp 20%	Tamp 20%	Consolidate	Consolidate	
Style PM6	Consolidate	Consolidate	Consolidate	Consolidate	
Style 1965K	Tamp 20%	Tamp 20%	Consolidate	Consolidate	

Consolidate refers to up to 10% visual compression