



RUST PRO

RUST & CORROSION INHIBITOR

UNSURPASSED PROTECTION AGAINST RUST & OXIDATION

Rust Pro™ Rust Inhibitor capable of providing up to 5 years protection in indoor storage and 2-3 years protection outdoors. For carbon steel or any exposed metal or painted surface in high-salt environments. Proven and used by major oil & gas companies for their stack-out programs and pipe protection.

Rust Pro is an oil-dispersed, thixotropic, all-purpose rust preventive formulated to provide unsurpassed long-term protection against rust and oxidation. Because of its thixotropic characteristics, Rust Pro has the ability to become fluid with agitation enabling the residual film to be self-healing.

USE RUST PRO:

- On parts exposed to salt spray environments.
- When parts will be subjected to long term storage or transportation.
- When maximum protection is required against corrosion.

KEY PERFORMANCE BENEFITS:

- Long-term protection for ferrous and nonferrous parts for up to 5 years indoors and 2-3 years outdoors.
- Once on the surface of the part, Rust Pro becomes a semi solid reducing drips and runoff.
- Superior clean-ability - it can be easily removed with an alkaline cleaner.

APPLICATIONS:


CAN BE SPRAYED OR BRUSHED FOR EVEN COATING ON THE SURFACE

Apply undiluted for maximum protection. The product can be applied by airless spray or dip. Target application film thickness is 2ml. When dipping, the tank should be agitated so that the product becomes fluid and completely coats all surfaces.

- Airless sprayer - 11 m² per litre (450 sq. ft. per gallon)
- Paint roller - 15 m² per litre (600 sq. ft. per gallon)
- Brush - 16 m² per litre (650 sq. ft. per gallon)

The Environment vs ProOne

3/16" inch thick bare steel. Right side brushed with Rust Pro and wiped off. Steel exposed to open air (67°F, 63% humidity) and muriatic acid for 24 hours.

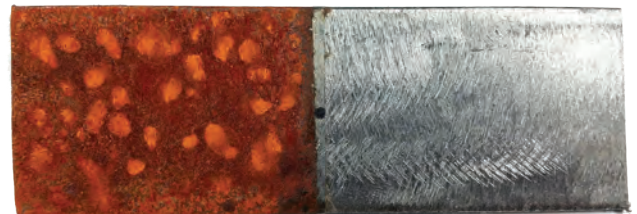

UNTREATED

TREATED

PRODUCT DATA

Appearance of Fluid	Hazy Blue Translucent Semi Solid
Odor	Trace of Petroleum
Viscosity cSt @ 40°C	Semi Solid
Pour Point	150°F
Specific Gravity	.880-.992

ProOne#	Size	Case Pack
P1-41001	1 gallon/3.78L	4
P1-41005	5 gallon/18.9L	1
P1-41055	55 gallon/208L	1